

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IL04/000994

International filing date: 31 October 2004 (31.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: IL  
Number: 158675  
Filing date: 30 October 2003 (30.10.2003)

Date of receipt at the International Bureau: 12 January 2005 (12.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse





מדינת ישראל  
STATE OF ISRAEL

Ministry of Justice  
Patent Office

משרד המשפטים  
לשכת הפטנטים

This is to certify that  
annexed hereto is a true  
copy of the documents as  
originally deposited with  
the patent application  
particulars of which are  
specified on the first page  
of the annex.

זאת לתעודה כי  
רצופים בזזה העתקים  
נכוניים של המסמכים  
שהופקדו לכתהילה  
עם הבקשה לפטנט  
לפי הפרטים הרשומים  
בעמוד הראשון של  
הנספח.

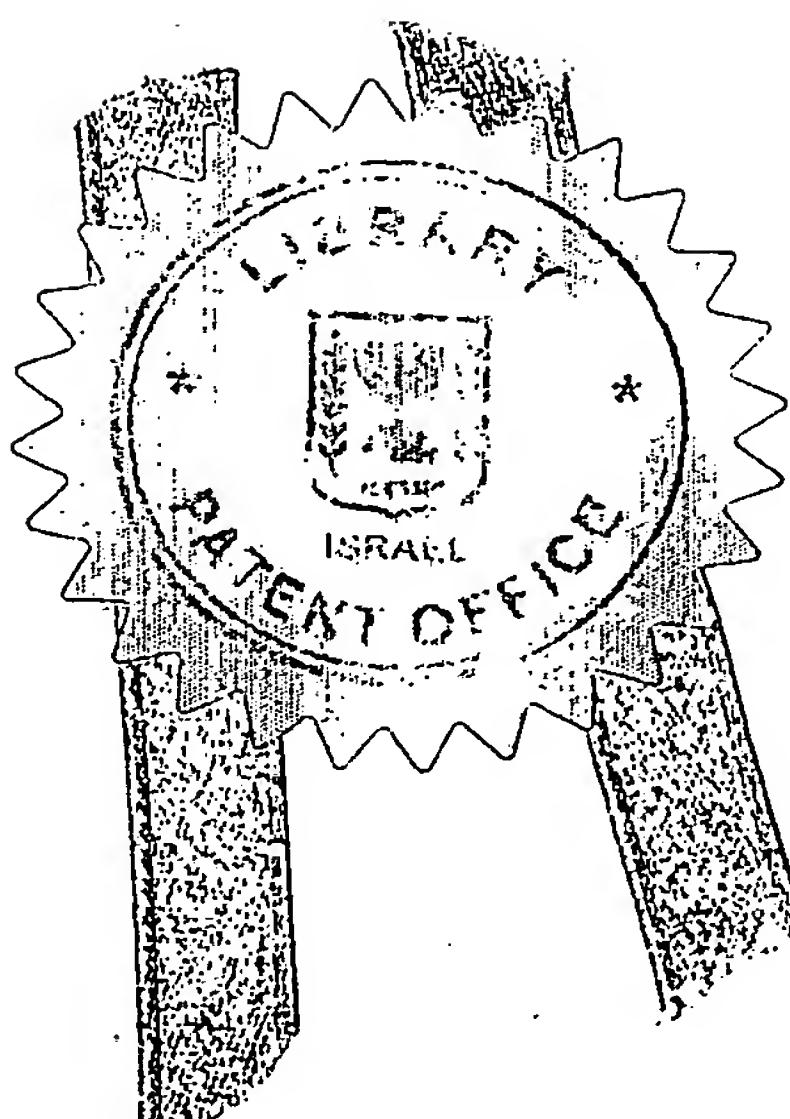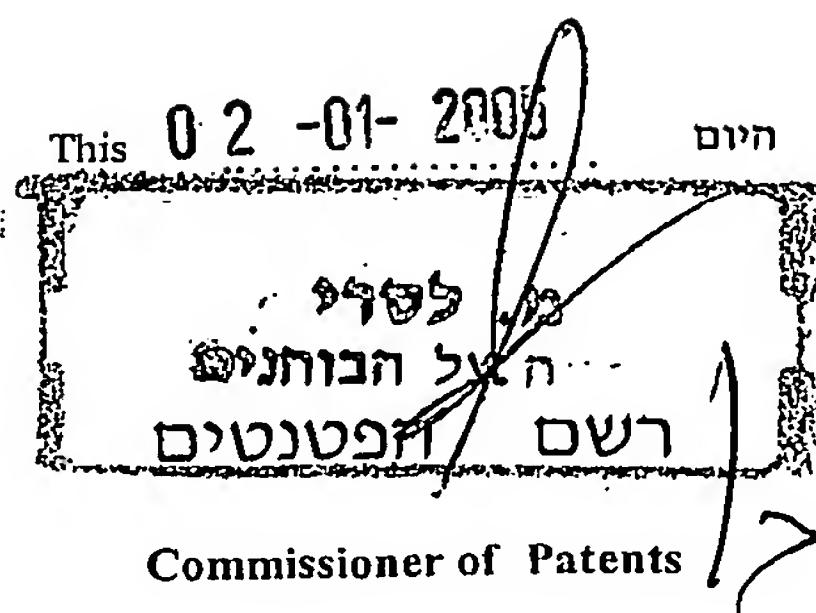

נחותר  
Certified

בקשה לפטנט  
Application for Patent

מספר : Number	158675
תאריך : Date	30-10-2003
הקודם/נדחת Ante/Post-dated	

Inventor:  
Zvi Barzilay

Dagan Automation Advanced  
Applications (2002) Ltd.  
Moshav Haniel 42865  
Israel

דגן אוטומציה יישומים  
מתקדמים (2002) בע"מ  
מושב חניאל 42865

העברה Assignment

שםתת הואה  
of an invention the title of which is

בצל אמצעה מכח  
Owner, by virtue of

لوح פלסטי

(בעברית)  
(Hebrew)

Plastic Board

(באנגלית)  
(English)

hereby apply for a patent to be granted to me in respect thereof.

בקשת בזאת כי ניתן לי עליה פטנט

בקשות חילוק	בקשת פטנט-טוקף	דרישה דין קדימה
Application of Division	Application for Patent Addition	Priority Claim
מבקשת פטנט from Application	לבקשת/לפטנט to Patent/Appl.	מדינת האגוד Convention Country
No. .... dated .....	No. .... dated .....	מספר/סימן Number/Mark
מס' .....	מס' .....	תאריך Date
מיום .....	מיום .....	הוגש בעניין .....
ימי כח: <input checked="" type="checkbox"/> הכללי <input type="checkbox"/> היחיד <input type="checkbox"/> בזוק בזוק <input type="checkbox"/> עוז-זגש P.O.A.: general/individual-attached/to be filed later filed in case .....		
המعن למארחת טפסטים בישראל Address for Service in Israel מרק זוטא משרד עורכי דין פטנטים T.L. 2162, רח' בן יהודה 19 פתח תקווה 49120		
חתימת המבקש Signature of Applicant  מרק זוטא, משרד עורכי דין פטנטים Marc Zuta, Patent Attorney		
2003 ....., 10 ....., 28 ....., שנת ....., of the year היום ....., of This		
לשימוש הלשכה For Office Use		

טפס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם בספר ובתאריך ההגשת, הנה אישור להגשת הבקשה שפרטיה רשומים לעיל.  
 This from, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

• מחק את המתו"ר Delete whatever is inapplicable

لوح פלסטיק

Plastic Board

Applicant: Dagan Automation Advanced  
Applications (2002) Ltd.

Inventor : Zvi Barzilay

Patent Attorney: Marc Zuta

לוח פלסטיק

### Plastic Board

#### TECHNICAL FIELD

The present invention relates to plastic boards for the construction industry, and more particularly to such boards using a novel coating.

#### BACKGROUND OF THE INVENTION

Plastic boards made of foam and with a polymer coating find many uses in the construction industry. Such boards are used in the bathroom or other areas of high humidity, for example.

The boards may be any type of board used in the construction industry. For example, one can use the board known as Light Building Board, made of plastic foam such as XPS or EPS polystyrene. Other boards may be made of MDF or other materials.

The board is coated on both sides with a thin layer of plastic adhesive material. The coating may include a mixture of plastic adhesives, additives and cement/concrete, as known in the art.

The coating improves the mechanical strength of the board and its impact-related properties. The coating may include flame-retardant materials.

Preferably, the thin coating is applied over a mesh made of fiberglass or plastic.

The board can be made in various thickness values, for example about 2 cm (centimeters).

The board having the abovedetailed structure is light weight and has good thermal insulating properties, together with improved mechanical strength and machinability.

A possible problem with such prior art boards lies in reliably bonding of other construction parts to it. Such parts may include tiles, plaster, etc. Furthermore, it may be desired to reliably secure the board itself to a wall, a bathtub, etc.

It is an objective of the present invention to overcome the abovedetailed problems in plastic boards.

#### SUMMARY OF THE INVENTION

According to the present invention, there is provided a plastic board with means for achieving improved adherence properties to other parts used in the construction industry.

It has been found by the present inventor that the flat (planar) shape of the board's coating may not achieve the best adherence performance.

Accordingly, a new board structure has been devised, which has a domed shape - the board's external surface is made of tiny domes. Such domes achieve better bonding to other construction parts, for example including tiles, plaster, etc. Furthermore, better bonding of the board itself to walls, a bathtub, etc. may be achieved.

Furthermore, the coating is made thicker - between 1 mm and 5 mm, thus achieving improved performance.

A new method for manufacturing Light Building Boards has been devised as well.

Further objects, advantages and other features of the present invention will become obvious to those skilled in the art upon reading the disclosure set forth hereinafter.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 illustrates the structure of a Light Building Board

Fig. 2 details a cross-sectional view of a Light Building Board (prior art)

Fig. 3 details a cross-sectional view of a novel Light Building Board

**DETAILED DESCRIPTION OF THE INVENTION**

A preferred embodiment of the present invention will now be described by way of example and with reference to the accompanying drawings.

Fig. 1 illustrates the structure of a Light Building Board 1, comprising a foam board 12 with one or two of its sides coated with a thin layer 13 of a plastic adhesive or cement.

Preferably, the thin coating layer 13 includes a fiberglass or plastic mesh 14 therein.

This mesh 14 improves the mechanical properties of the board.

Fig. 2 details a cross-sectional view of a Light Building Board 1 in prior art. The coating 13 is thin, thus achieving a generally flat external surface 132. Such a surface makes it more difficult to attach other construction parts to the board.

Moreover, the thin coating 13 may not reliably hold the mesh wires 14 secured to the board 12, thus sometimes allowing the wires to become separated and the whole board structure 1 possibly getting loose.

Fig. 3 details a cross-sectional view of a novel Light Building Board 1.

The coating 13 is preferably thicker, thus forming little dome-like protrusions 133 over the external surface 132 of the board 1.

Thus, for example, for a board about 2 cm thick, a coating thickness of about 1 to 2 mm may be used.

The materials of the coating may include a mixture of adhesives, cement, inert materials for flow enhancement. Flame retardant materials may be included as well where necessary.

The coating is preferably made thicker than in prior art, between 1 mm and 5 mm, thus achieving improved performance.

The result - a board with an external surface of larger area, which can be reliably bonded to other construction parts.

#### Board manufacturing method

A preferred board manufacturing method includes:

- a. Applying a layer of coating over the board to be used in the construction industry
- b. laying a fiberglass mesh over the board, within the coating
- c. applying a second layer of coating
- d. moving one or more spreading knives over the surface thus formed. An external surface including dome-like protuberances is thus manufactured.

End of method.

It will be recognized that the foregoing is but one example of a board and method for its manufacture within the scope of the present invention and that various modifications will occur to those skilled in the art upon reading the disclosure set forth hereinbefore.

## CLAIMS

What is claimed is:

1. A board for the construction industry comprising a base board coated with a thin layer of coating material, wherein an external surface of the coating has an enhanced area.
2. The board for the construction industry according to claim 1, wherein the base board is made of plastic or MDF.
3. The board for the construction industry according to claim 1, wherein the base board is made of a XPS or EPS polystyrene.
4. The board for the construction industry according to claim 1, wherein the external surface of the coating comprises a plurality of tiny dome-shaped protuberances.
5. The board for the construction industry according to claim 1, wherein the coating includes a mixture of plastic adhesives, additives and cement/concrete.



Marc Zuta,  
Patent Attorney for Applicant

158625

1/3

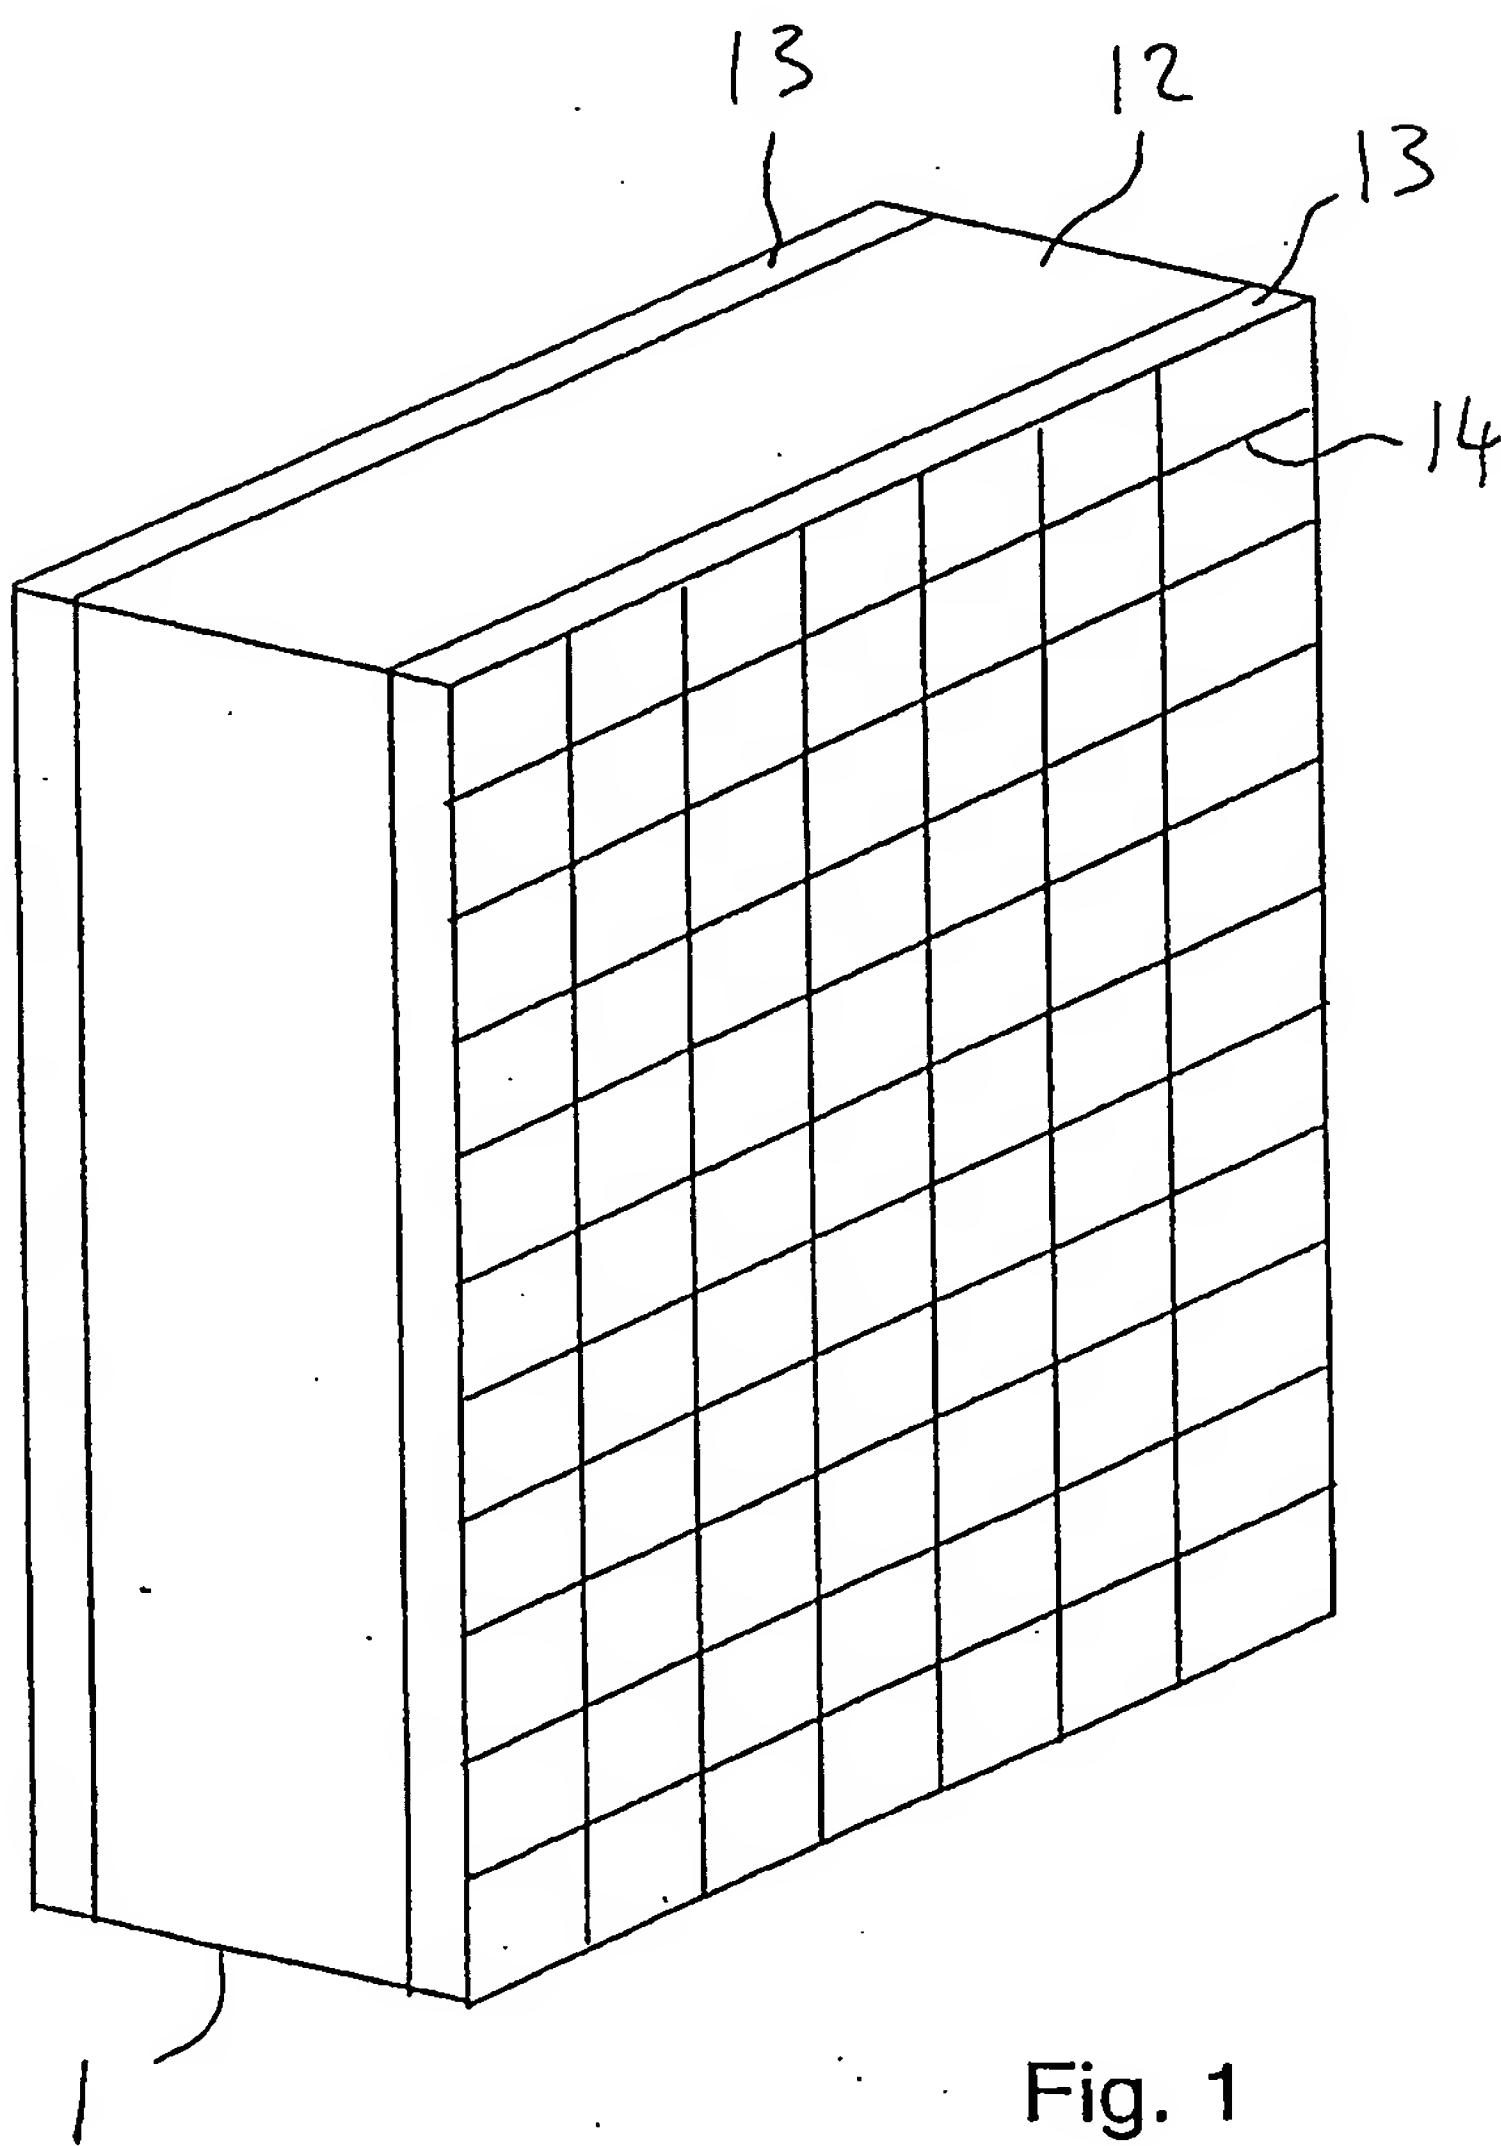


Fig. 1

2/3

Prior Art

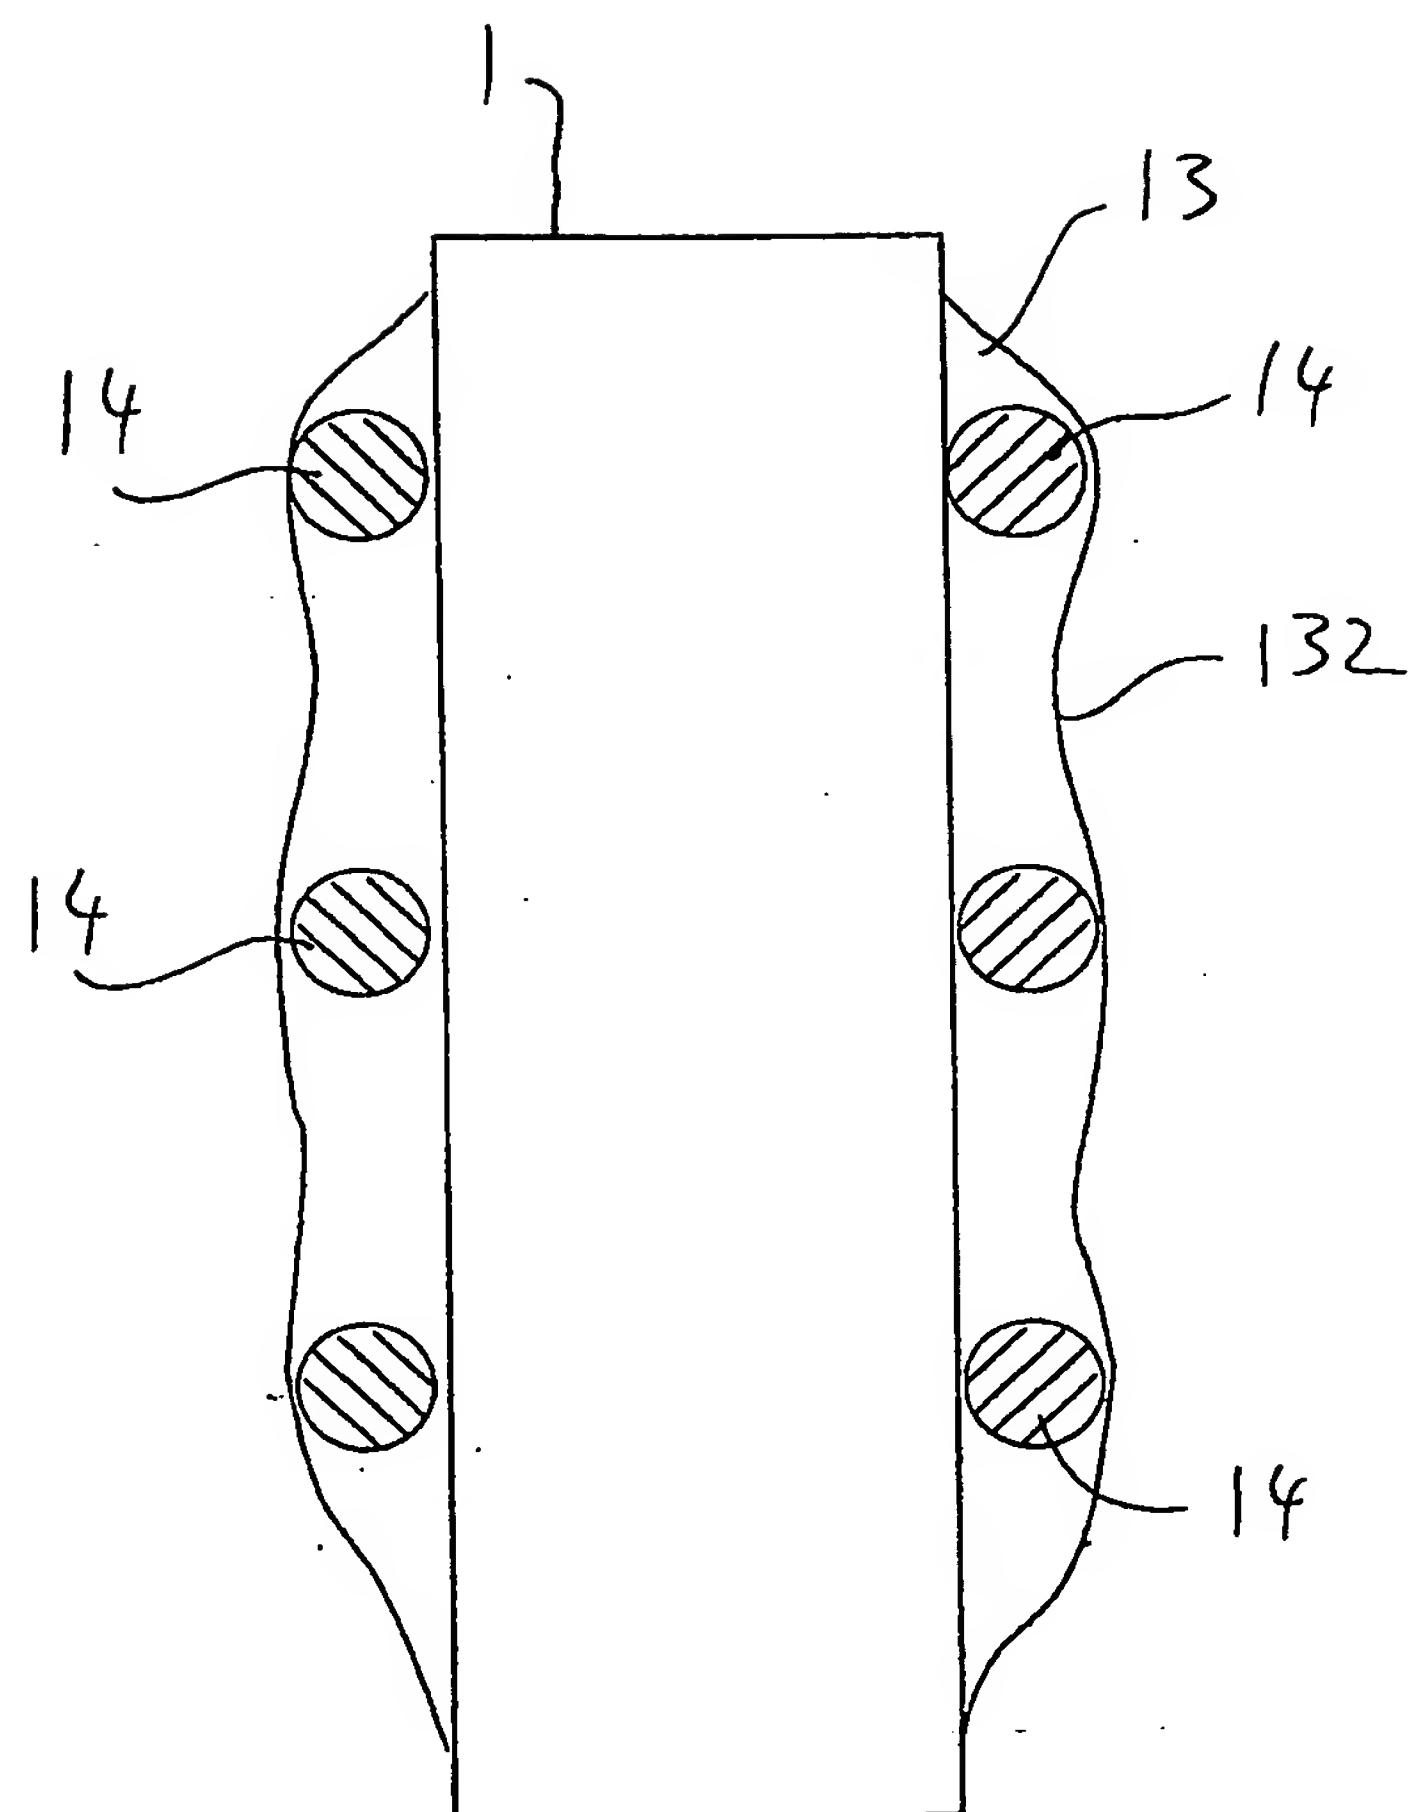


Fig. 2

3/3

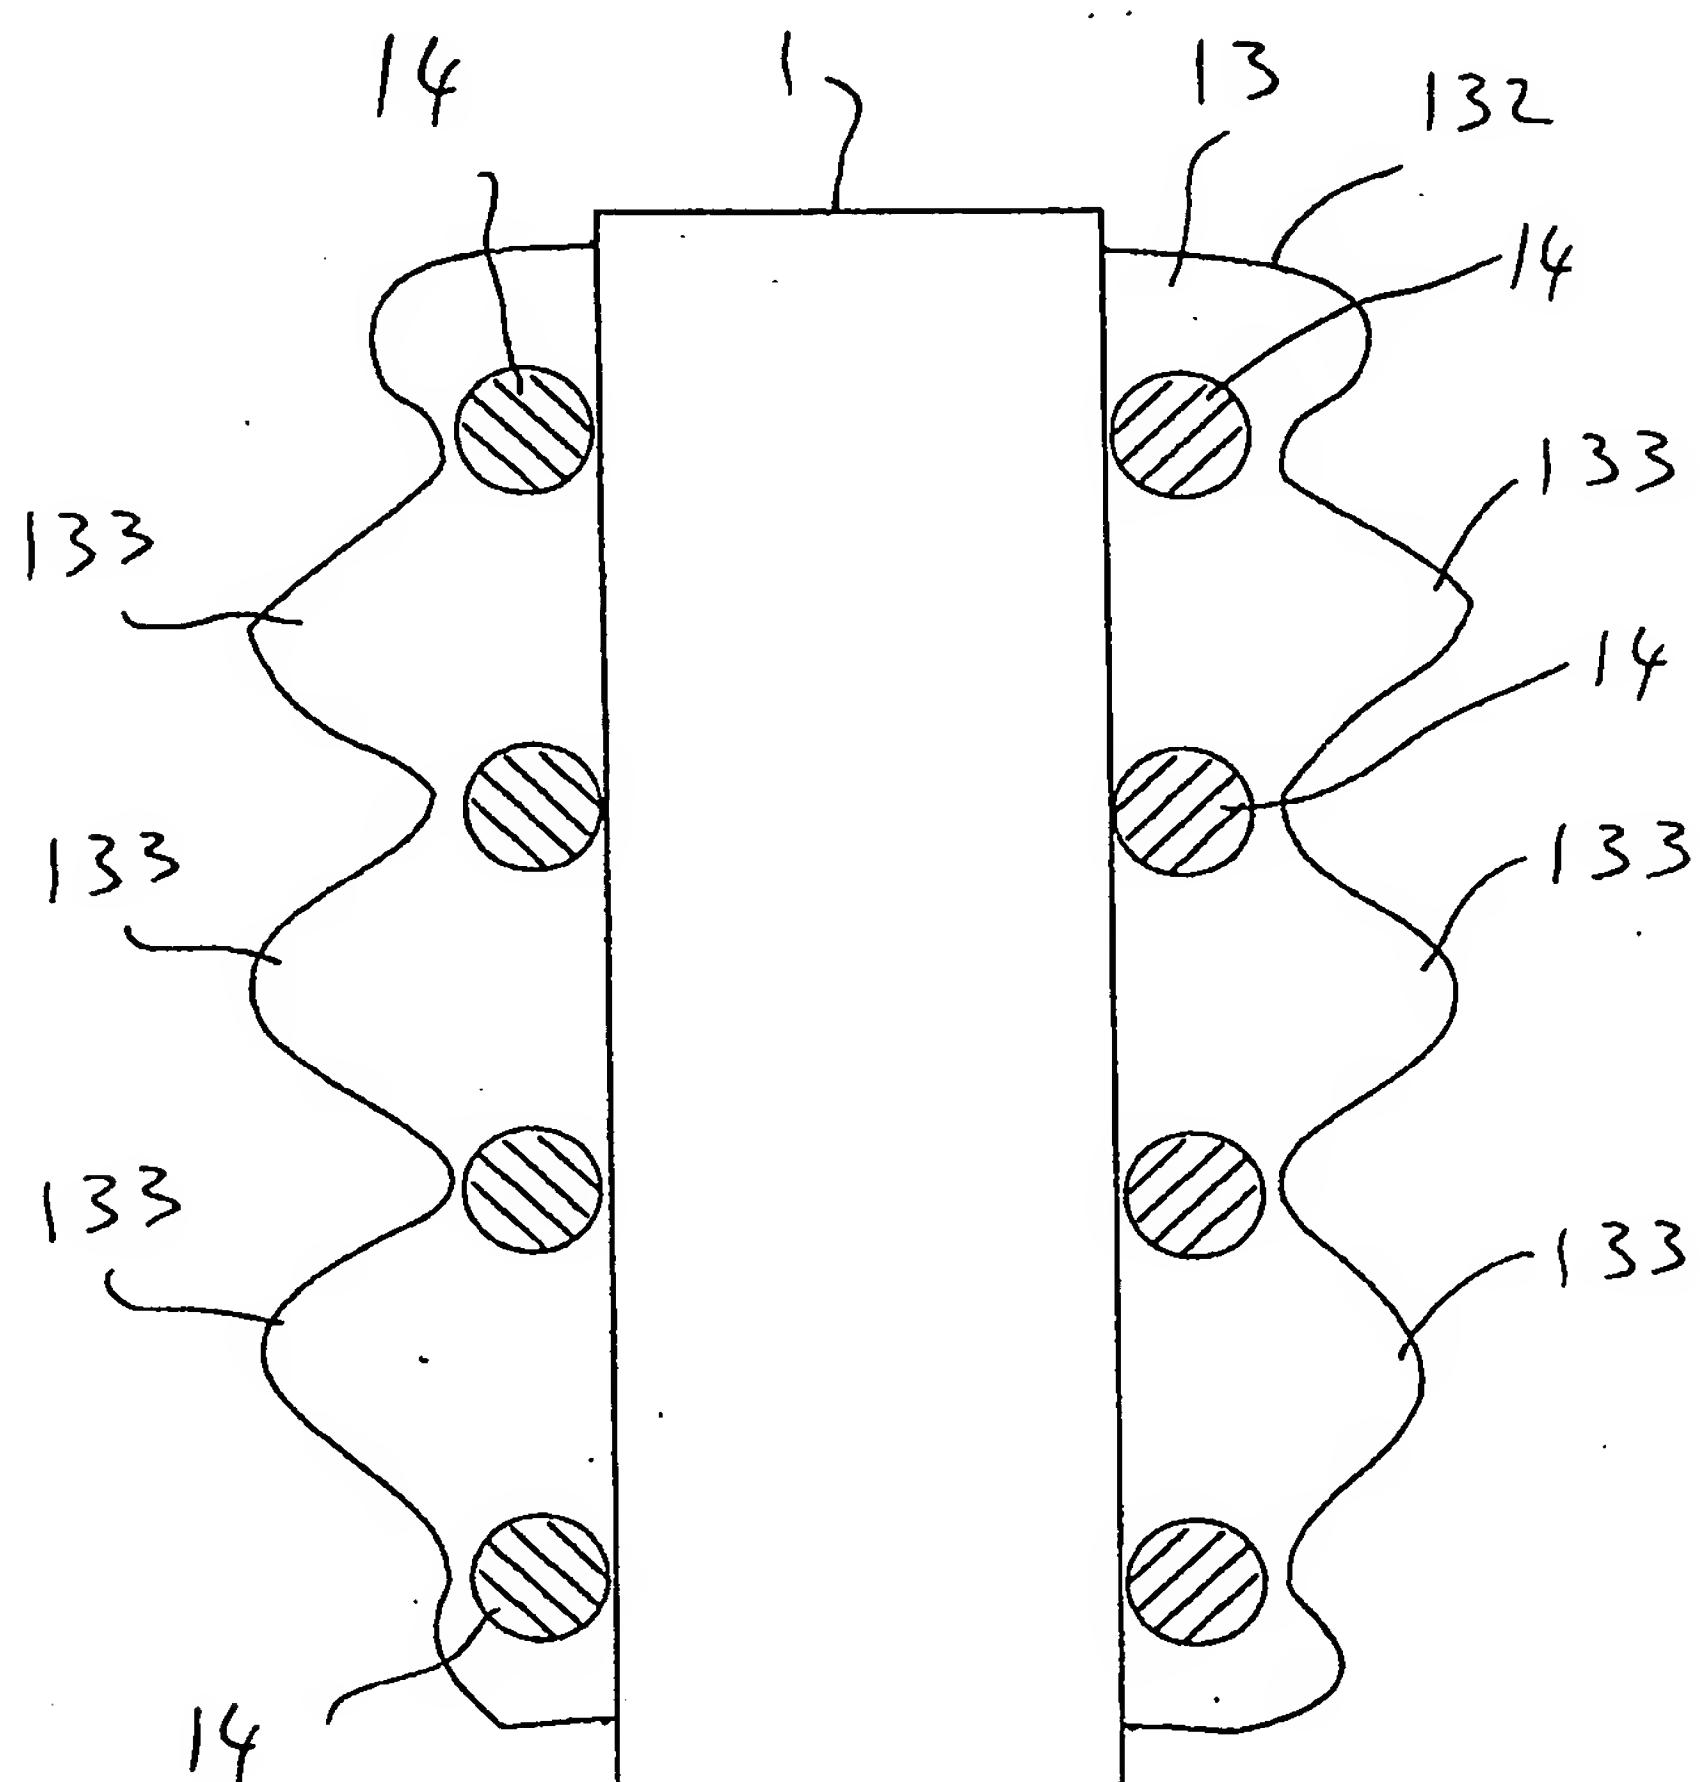


Fig. 3